



Inspection Point "B"
1.429 Dia. +.000/-0.001

Inspection Point
"A", 1.735 Dia.

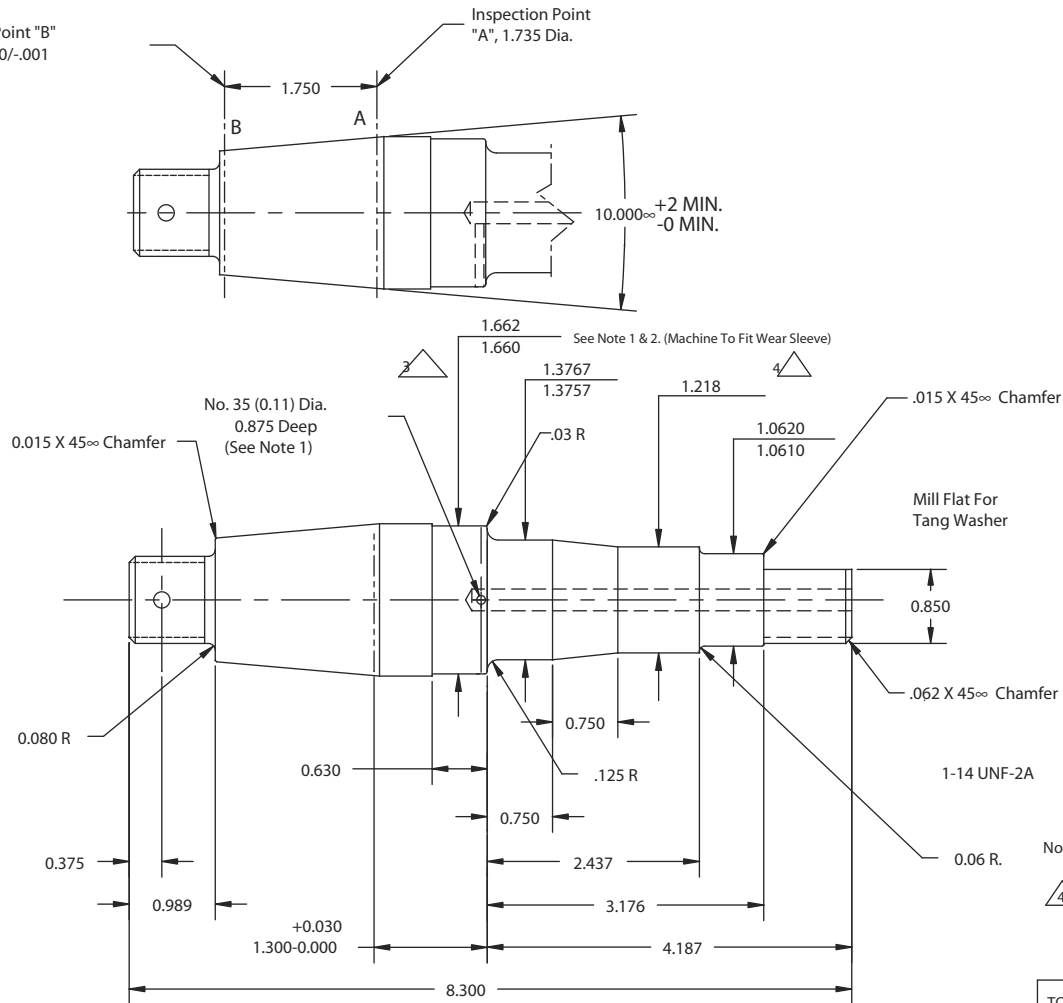

C Size (0.242) Dia.
4.44 Deep



Note:



1. Apply Dow Corning Silicone Seal to Wear Sleeve Before Installation.
2. Press Wear Sleeve In Place Before Drilling No. 35 Hole.

1 1.750 X 8.360 C1040-1045 Steel.

4	12-5-05	Silicone Note Added
3	10-25-00	Wear Sleeve Added
2	8-14-00	1.700/1.694 Was 1.722/1.716
1	5-2-00	0.375 Was 0.258
MARK	DATE	REVISION

TOLERANCES (EXCEPT AS NOTED)		 Tie Down Engineering 5901 Wheaton Drive Atlanta, Georgia 30336	
DECIMAL ±0.010			
ANGULAR ±1		TITLE 1750# S/L Torsion Axle Spindle	
Scale: ACAD		Material: 1 3/4 C1040/1045 Steel	
DATE: 4-3-00		DWG. NO. 80043	